

MOLYSLIP®

World-renowned anti-seize compounds & thread lubricants from Moly Slip

COPASLIP

Marine & Industrial Applications

GENUINE COPASLIP FROM MOLYSLIP

Protects against seizure, fusion and corrosion at temperatures up to 1100°C and in other extreme conditions.

Premium grade high temperature anti-seize

- For use in high pressure & harsh environments
- Ensures quick assembly & non destructive dismantling
- Unique "film strength" for even and tenacious application


COPASLIP is available in 500g, 5kg, 16kg, 25kg, and 65kg containers, as well as in 200kg drums.

COPASLIP should be routinely applied in assembly operations where subsequent dismantling is necessary for maintenance or service.

COPASLIP LEAD FREE

For use where there may be a prejudice against lead

- Utilises a synthetic lubricant to maintain film strength
- Also available in handy 100g tube & 400ml aerosols

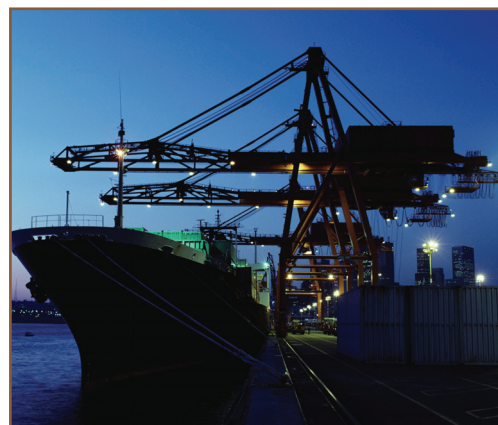


ALUMSLIP

Marine & Industrial Applications

Containing finely divided lamellar particles of aluminium together with magnesium silicate and graphite, it is ideal for applications where the presence of copper is not desirable due to the risk of electrolytic corrosion, or in the presence of chemicals which react with copper.

- Anti-seize for use where copper is undesirable
- Protects against galling, corrosion and seizure

ALUMSLIP is available in 500g, 5kg and 16kg containers.

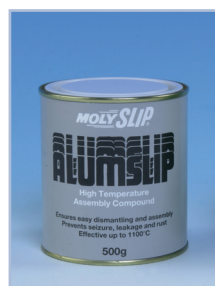

Assembly and Dry Lubrication Compounds

AS40 Anti-Scuff Paste

Marine & Industrial Applications

AS40 is a gelled lubricating oil which contains molybdenum disulphide and graphite together with advanced corrosion inhibitors.

- Assembly compound which ensures bedding-in without scuffing or scoring
- 40% Molybdenum Disulphide plus graphite and corrosion inhibitors
- Extreme high load capabilities

AS40 is available in 500g tins or 5kg kegs.



AS60 Anti-scuff Paste

- Similar to AS40, but with 60% MoS₂ which exceeds Military Specifications

AS60 is available in 800g tins or 5kg containers.


ADF Air Drying Film

Marine & Industrial Applications

MOLYSLIP ADF is pure MoS₂ with a bonding resin, dispersed in a non-flammable air-drying solvent.

- Application results in a pure MoS₂ dry film
- Lubricates where oils & greases might be contaminated by dust, dirt or sand
- Invaluable for pre-assembly treatment

ADF is available in 300ml aerosols, 5ltr tins or drums of 25ltr and 205ltr.

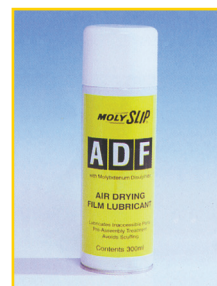

For further information on these or other products in the MolySlip range, please contact your dealer or:

MOLYSLIP ATLANTIC LIMITED
1 ASTROP ROAD, MIDDLETON CHENEY
OXON OX17 2PD, UK.
Tel: +44 (0)1295 710001 Fax: +44 (0)1295 712002
Email: enquiries@moly Slip.co.uk
Web site: www.moly Slip.co.uk